

MITSUBISHI VIDEO COPY PROCESSOR

Essential front access improves user ease.



Automatic loading for trouble-free ribbon cartridge replacement.

Control panel tucks neatly into the unit for storage.



Paper cassette crafted for easy mounting.




Space-saving unit storage.



Effective heat and dust case design.

Optimum air duct design draws out dust more efficiently than ever before.



Lighting to track print status.



Paper catcher with plenty of space to spare.



Specifications


Item	Details	
Printing system	Dye-sublimation thermal transfer full color	
Head resolution	423DPI	
Print resolution	S-size: 1600 x 1200 dots L-size: 2100 x 1600 dots	
Gradation	256 gradation each for YMC 16.7-million-hue full color	
Print paper	Cut paper	
Ink ribbon	3P	Y (yellow) + M (magenta) + C (cyan) (specialized ribbon cartridges)
	4P	Y (yellow) + M (magenta) + C (cyan) + Overcoat (specialized ribbon cartridges)
Printed form size (mm)	S-size: 100 x 94mm	L-size: 148 x 100mm
Print size (mm)	S-size: 96 x 72mm	L-size: 126 x 96mm
Paper capacity (sheets)	3P	S-size: 80 sheets L-size: 50 sheets
	4P	S-size: 60 sheets L-size: 40 sheets
Printing time (standard mode)	3P	S-size: Approx. 16 sec. L-size: Approx. 25 sec.
	4P	S-size: Approx. 20 sec. L-size: Approx. 31 sec.
Interface	S-video, composite video	
Input Signal	NTSC / PAL automatic switching	
Video memory	8-frame memory	
Control terminal	RS-232C (D-SUB25 pin)	
	Remote terminal (MINI DIN 8 pin, stereo mini-jack)	
Dimensions	Width 212 x height 125 x depth 425mm	
Weight	Approx 7.6kg	
Power supply	AC120 / 220V - 240V, 50 / 60Hz	
Power consumption	1.7A (AC120V), 1.0A (AC220V) / Standby: 0.3A	
Accessories	Power cord, instruction manual, paper cassette	

*Because this processor is not a medical device, printed images should not be used for diagnostic purposes.

Optional (paper / ink ribbon set, footswitch)


Model Name	Specifications
CK30S	S-size standard printing paper & ribbon cartridge, 80sheets x 3packs
CK30L	L-size standard printing paper & ribbon cartridge, 50sheets x 4packs
CK30S4P	S-size overcoat printing paper & ribbon cartridge, 60sheets x 3packs
CK30L4P	L-size overcoat printing paper & ribbon cartridge, 40sheets x 4packs
R800F	footswitch

Part Names

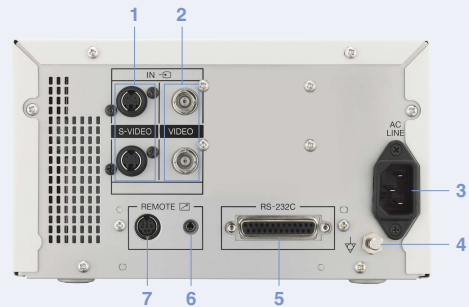

- 1.S-VIDEO image input/output terminal
- 2.VIDEO Image input/output terminal
- 3.AC LINE socket
- 4.Equipotential terminal
- 5.RS-232C connected terminal
- 6.REMOTE 1 terminal (stereo jack)
7. REMOTE 2 terminal (MINI DIN8 pin)

External Dimensions (unit: mm)

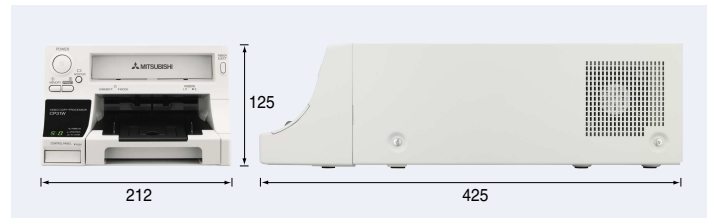

MITSUBISHI ELECTRIC CORPORATION
 HEAD OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN