

A6 SIZE MONOCHROME THERMAL PRINTER

*High Speed, High Resolution Printer
With User-Friendly Controls
For Medical Applications*



MODEL

P93E

Key Features

High speed printing

High-density 325dpi thermal head

User-friendly controls conveniently located on front panel

Small footprint

Jam-free reliability

Worldwide compatibility

Simple and Convenient to Operate

The most complete and convenient user interface. All principal functions are accessible from the front panel.



Dependable, High Resolution Images for Medical Applications

High-density thermal head and thermal recording mode reproduce delicate lighting and shade. High resolution 1280 × 500 pixels and 256 grades of normal size printing (horizontal picture element density of 325 dpi).


Speed and Detail, and the Best Size Image Every Time

Enlarge or reduce specific parts of images in an instant. Set the output from 0.5 to 2.0 in scale, at 0.1 increments, for the ideal print size every time.

Specifications

Print Method	Thermal printing on thermal sensitive paper		
Dot Density	1280 dot / 100mm (325dpi)		
Resolution(dot)	Print Size	NTSC	PAL
	Normal	1280 × 500	1280 × 600
	Side (landscape)	1280 × 1250	1280 × 1275
Grayscale	256 levels		
Print Size	Print Size	NTSC	PAL
	Normal	100 × 75 mm	100 × 75 mm
		3.9 × 2.9 inches	3.9 × 2.9 inches
Side (landscape)	130 × 98 mm	133 × 99 mm	
	5.1 × 3.8 inches	5.2 × 3.8 inches	
Print Speed	Print Size	NTSC	PAL
	Normal	3.3 sec.	3.9 sec.
		Side (landscape)	8.4 sec.
Input Signal	Standard composite video (NTSC and PAL)		
Dimensions (W × H × D)	154 × 89.5 × 256 mm (6 × 3.5 × 10 inches)		
Weight	Approx. 2.8 Kg (6.16 lbs)		
Dual Power Supply	AC 100-240V, 50/60 Hz		
Power Consumption	1.5 to 0.8 amps		
Regulatory Approvals	UL2601-1, CAN/CSA C22.2 No. 601.1 (C-UL), FCC-Class A TUV-GS, TUV-GM, CE Mark (EMC; 89/336/EEC)		
Accessories	Instruction book, thermal paper (KP65HM-CE), cleaning paper BNC/BNC cable, wired remote AC power cord (P93E: AC250V, P93W: AC120V)		

Component names

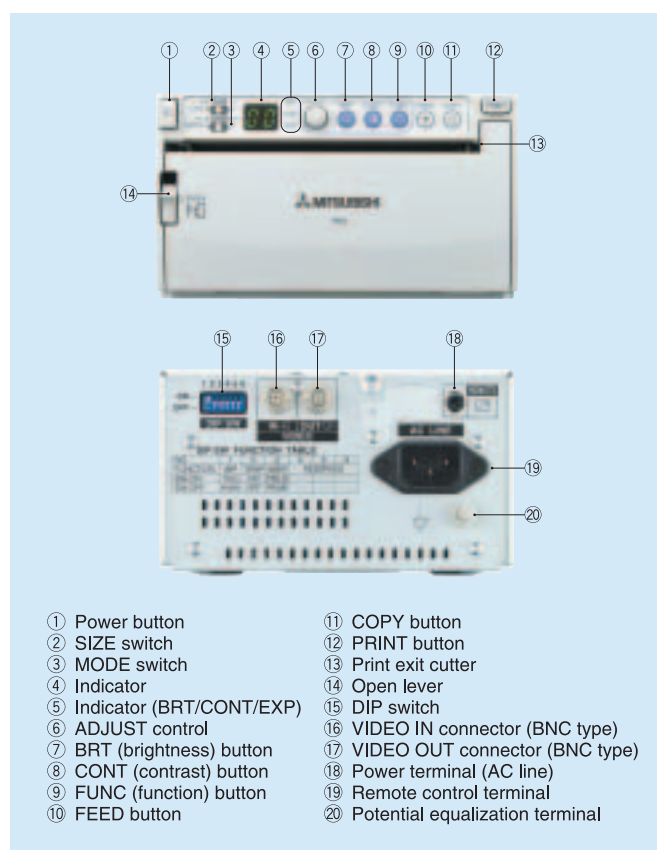


Options

Thermal recording paper	
KP65HM-CE/KP65H-CE	High-density thermal roll paper
KP61B-CE/KP61S-CE	Multitones thermal roll paper
KP91HG-CE	High glossy thermal roll paper

Dimensions

Unit: mm (inches)

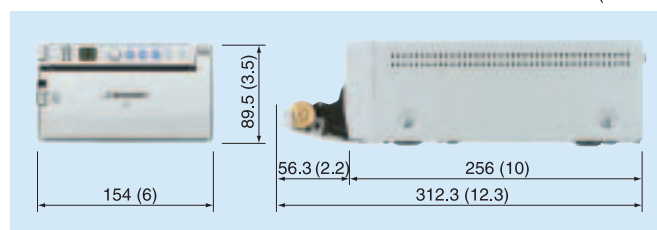

MITSUBISHI ELECTRIC EUROPE
 TRAVELLERS LANE, HATFIELD, HERTFORDSHIRE AL10 8XB
 Telephone: (01707) 278684 Fax: (01707) 278541 E-mail: printer.info@meuk.mee.com

For more information about our printers, please see the website at:

www.mitsubishielectric.co.uk/vis