

LED Ringlight, A25040

Mechanical Specifications

Mounting:	M4 Mounting Holes
Connector Type:	8 Pin DIN Connector
Cable Length:	78 ³ / ₄ " (2 M)
Housing Type:	Black Anodized Aluminum
Temperature Range:	Operating – 20 °C to + 40 °C
Temperature Range:	Storage – 40 °C to + 80 °C
Outside diameter:	4.96" (126 mm)
Inside diameter:	2.6" (66 mm)
Height:	1" (25.4 mm)
Weight of head:	0.56 lb. (350 gm), with cable: 0.77 lb. (350 gm)

LED Ringlight

The uniform, shadow-free illumination of our ringlight enhances pattern recognition.

Patented Features

- Matrix plate heat sink dissipates heat buildup to improve light output and extend component life.
- Matrix circuit design that maximizes reliability by isolating failures to individual LEDs.
- Intelligent design facilitates monitoring of light head temperature and intensity through continuous feedback via the built-in thermistor and photo-diode (Contact SCHOTT for further details).

Standard Features

- Standard LED: Ø 3 mm T1-housing
- Working distance: 3" to 8" (76 to 203 mm)
- Use in a steady-state mode as a general purpose area light, or in strobe mode to freeze motion, reduce exposure times and increase processing speed.
- One year warranty.
- Manufactured in the USA.


Ringlight and Accessories

Description	Part. No	Color	No. of Leds	Peak-Wavelength	Voltage	Current**	Size [mm]
Lighthead							
LED Ringlight	A25040	Red	193	630 nm	12 volt	780 mA	66/126
	A25046	Red	138 (2 rows)	630 nm	12 volt	560 mA	66/126
	A26047	Red	74 (1 row)	630 nm	12 volt	300 mA	66/126
	A25040.1*	White	193	–	24 volt	780 mA	66/126
	A25046.1	White	138 (2 rows)	–	24 volt	560 mA	66/126
	A25047.1	White	74 (1 row)	–	24 volt	300 mA	66/126
	A25040.2*	Green	193	574 nm	12 volt	780 mA	66/126
	A25040.3*	Yellow	193	595 nm	12 volt	780 mA	66/126
	A25040.4*	Blue	193	460–470 nm	24 volt	780 mA	66/126
	A25040.5*	UV	193	375 nm	24 volt	780 mA	66/126
A25040.6*	IR	193	875 nm	12 volt	780 mA	66/126	
Accessories							
Polarizer	A25041	enhances contrast on highly reflective surfaces					
Window	A25043	protects from dust					
Diffuse Dome	A25045	for diffuse shadowfree illumination					

* Lead time required


** Nominal forward current for continuous use

LED Ringlight

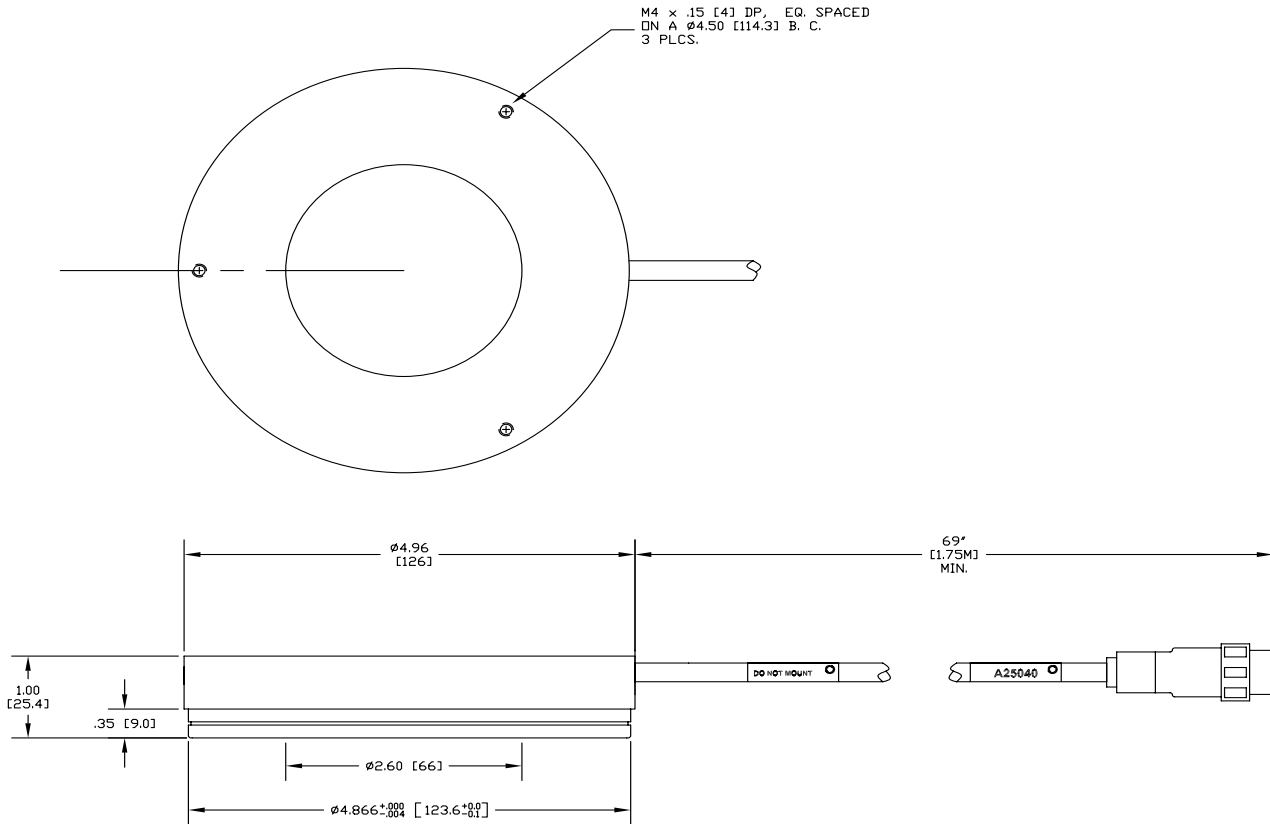

A25040
05/12/06

LED Ringlight, A25040

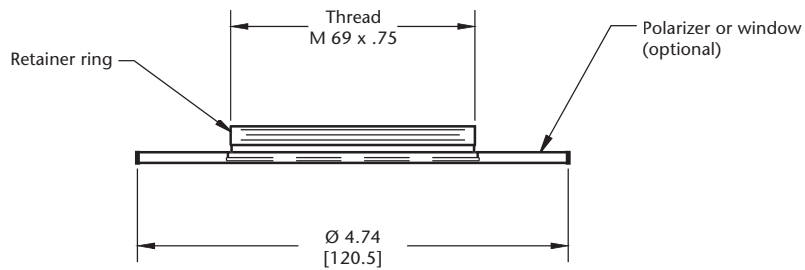

LED Ringlight, Polarizer and Window, A25041/A25043

Fiber Optics

SCHOTT North America, Inc.

62 Columbus Street

Auburn, NY 13021-3137

USA

Phone: +1315/255-2791

Fax: +1315/255-2695

E-mail: fiberoptics.auburn@us.schott.com

www.us.schott.com/fiberoptics

SCHOTT